



QGA II、QGB II 系列气缸

特点


1. QGA II、QGB II、设计中采用“ISO”国际标准，新的缓冲结构与密封型式，性能先进可靠，寿命长久耐用。
2. QGB II 带缓冲，QGA II 无缓冲装置。
3. 多种安装形式，使用安装方便，应用广泛。

气缸内径 (mm)		32	40	50	63	80	100	125	160	200	250	320
工作压力 (MPa)		0.15~1										
介质温度℃		-10~80										
理论作用力 N (以0.4MPa计算)	推力	322	502	785	1246	2010	3140	4906	8038	12560	19625	32154
	拉力	276	422	589	1050	1688	2819	4404	7253	11775	18086	29610
行程范围 (mm)	QGB II	≥	50	50	60	60	80	80	100	120	120	120
		≤	500	600	600	800	1200	1200	3000	3000	3000	3000
	QGA II	>	0	0	0	0	0	0	0	0	0	
		≤	600	600	600	800	1200	1200	1200	1200	1200	


注：超出行程范围可协商加工

安装形式


基本型

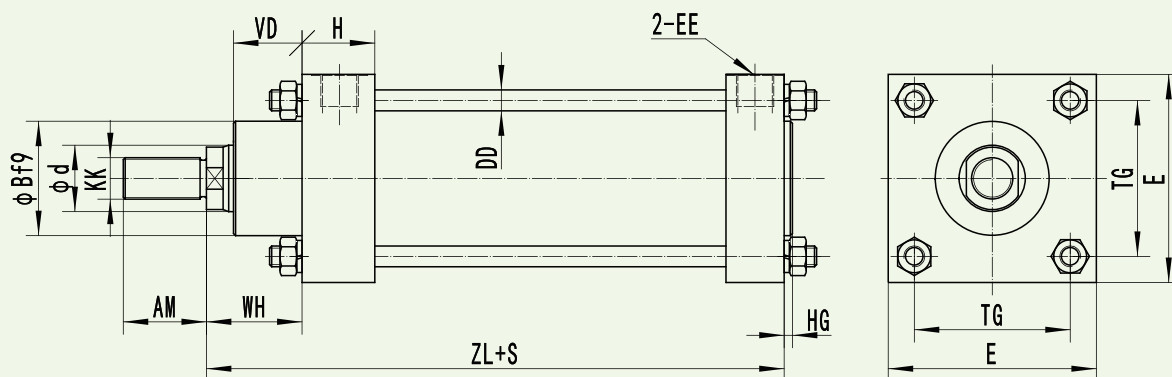


前法兰式 MF₁

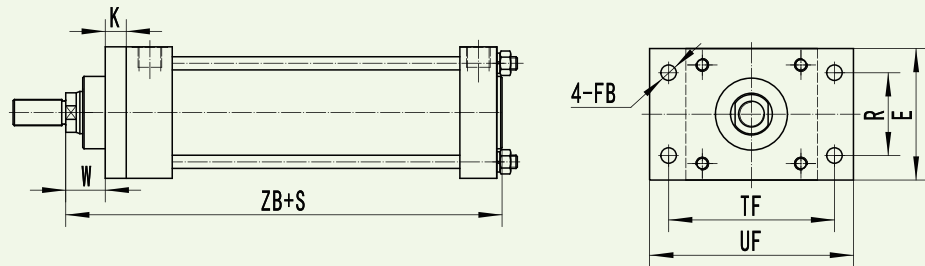


后法兰式 MF₁

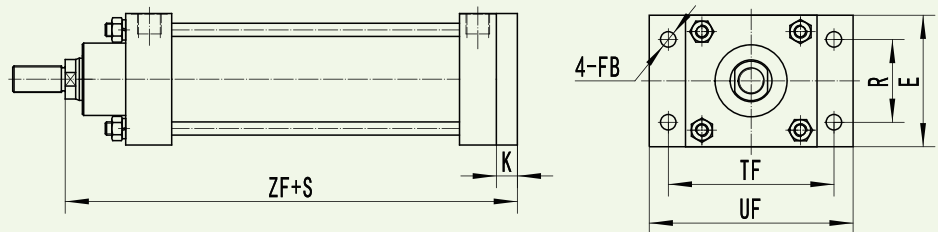


尾部单耳式 MF₁

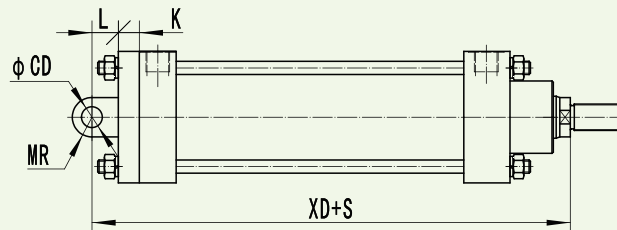


尾部双耳式 MF₁

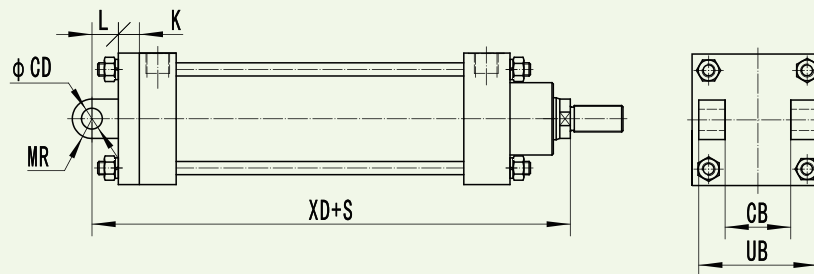

脚架式 MS₁

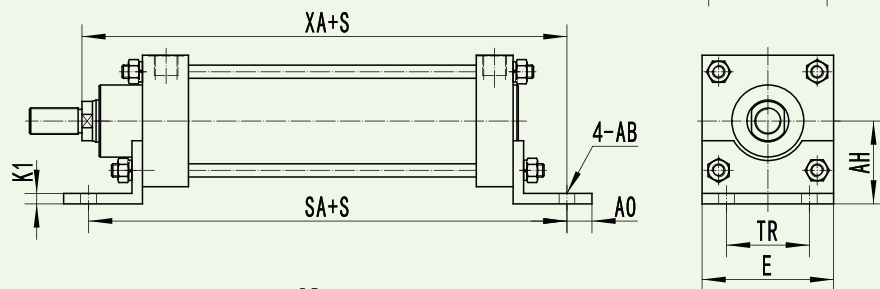

中间摆动式 MT₄

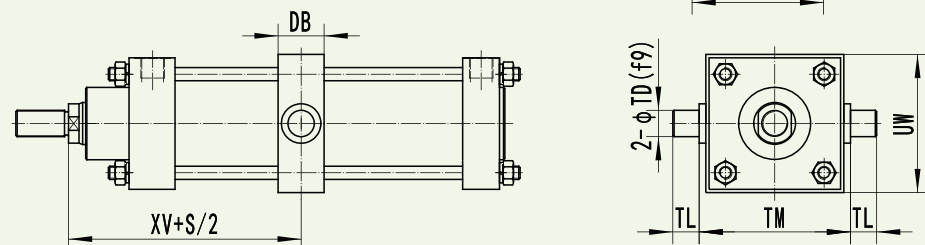



缸径	Φ32	Φ40	Φ50	Φ63	Φ80	Φ100	Φ125	Φ160	Φ200	Φ250	Φ320
KK	M10×1.25	M12×1.25	M16×1.5	M16×1.5	M20×1.5	M20×1.5	M27×2	M36×2	M36×2	M42×2	M48×2
Φd	12	16	25	25	32	32	40	50	50	70	90
ΦB	26	34	45	45	55	55	65	80	80	110	125
EE	M10×1	M14×1.5	M14×1.5	M18×1.5	M18×1.5	M22×1.5	M22×1.5	M27×2	M27×2	M33×2	M33×2
DD	M5	M6	M6	M8	M10	M10	M12	M16	M16	M20	M24
AM	B II	22	24	32	32	40	40	54	72	72	84
	A II	14	16	22	22	28	28	36	50	50	56
WH	B II	26	30	35	37	46	51	65	80	95	110
	A II	22	25	25	25	29	29	34	35	40	45
ZL	B II	120	135	145	158	174	189	225	260	275	300
	A II	94	110	110	130	134	155	175	196	210	225
HG	3	3	3	3	4	4	4	4	5	5	5
TG	34	40	48	60	75	90	112	145	180	225	280
E	48	55	65	80	100	115	145	190	225	280	350
ZB	B II	123	138	148	161	178	193	229	264	280	340
	A II	93	113	113	131	138	159	179	200	215	259
VD	B II	17	21	26	25	33	34	40	48	55	71
	A II	10	10	10	10	14	14	14	15	20	25
W	B II	16	20	25	25	30	35	45	60	70	80
	A II	12	15	15	13	13	13	14	15	15	19
UF	80	90	110	125	155	180	215	270	315	385	470
TF	64	72	90	100	126	150	180	230	270	330	400
R	32	36	45	50	63	75	90	115	135	165	200
FB	7	9	9	9	12	14	16	18	22	26	33
K	10	10	10	12	16	16	20	20	25	30	35
ZF	B II	130	145	155	170	190	205	245	280	300	370
	A II	100	120	120	140	150	171	195	216	235	289
EW	b12	26	28	32	40	50	60	70	90	90	110
CD	H9	10	12	12	16	16	20	25	30	30	40
MR	10	12	12	15	15	20	25	30	30	40	45
L	12	15	15	20	20	25	30	35	35	45	50
XD	B II	142	160	170	190	210	230	275	315	335	375
	A II	112	135	135	160	170	196	226	251	270	300
UB	45	52	60	70	90	110	130	170	170	200	220
CB	H12	26	28	32	40	50	60	70	90	90	110
H	B II	22	25	25	30	35	35	40	45	45	49
	A II	16	20	20	25	25	30	35	40	40	44
AH	32	36	45	50	63	71	90	115	135	165	200
TR	32	36	45	50	63	75	90	115	135	165	200
AB	7	9	9	9	12	14	16	18	22	26	32
SA	B II	142	161	170	185	210	220	250	300	320	350
	A II	116	141	145	169	187	208	231	281	310	340
XA	B II	144	163	175	190	215	230	270	320	345	380
	A II	114	138	140	160	175	196	220	256	280	305
AO	11	12	15	13	19	19	25	20	30	35	35
K1	4	5	6	6	8	8	8	10	12	14	16
UW	46	58	70	85	105	126	155	195	240	300	380
TD	12	16	16	20	20	25	25	32	32	40	50
R1	1	1.5	1.5	1.5	1.5	2	2	2	2	3	3
TL	12	16	16	20	20	25	25	32	32	40	50
TM	50	63	75	90	110	132	160	200	250	320	400
XV	B II	73	82.5	90	97.5	110	120	145	170	185	205
	A II	56	67.5	67.5	75.5	81.5	92	104.5	115.5	125	135
DB	25	30	30	35	35	45	45	60	60	70	80